

GF2SF2W-0/18


DC-18GHz 2-Way Power Divider




Performance:

频率范围 Frequency Range	DC~18 GHz
插入损耗 Insertion Loss	≤ 6.8 dB (excluding 3dB theoretical loss)
输入驻波 VSWR	≤ 1.30
隔离度 Isolation	≥ 11.8 dB
幅度平衡 Amplitude Balance	± 0.5 dB
相位平衡 Phase Balance	$\pm 5^\circ$
功率容量 Power Handling	1 W
接口形式 Connectors	SMA-Female
表面处理 Surface Finish	Conductive oxidation


Size: (mm/[inch])

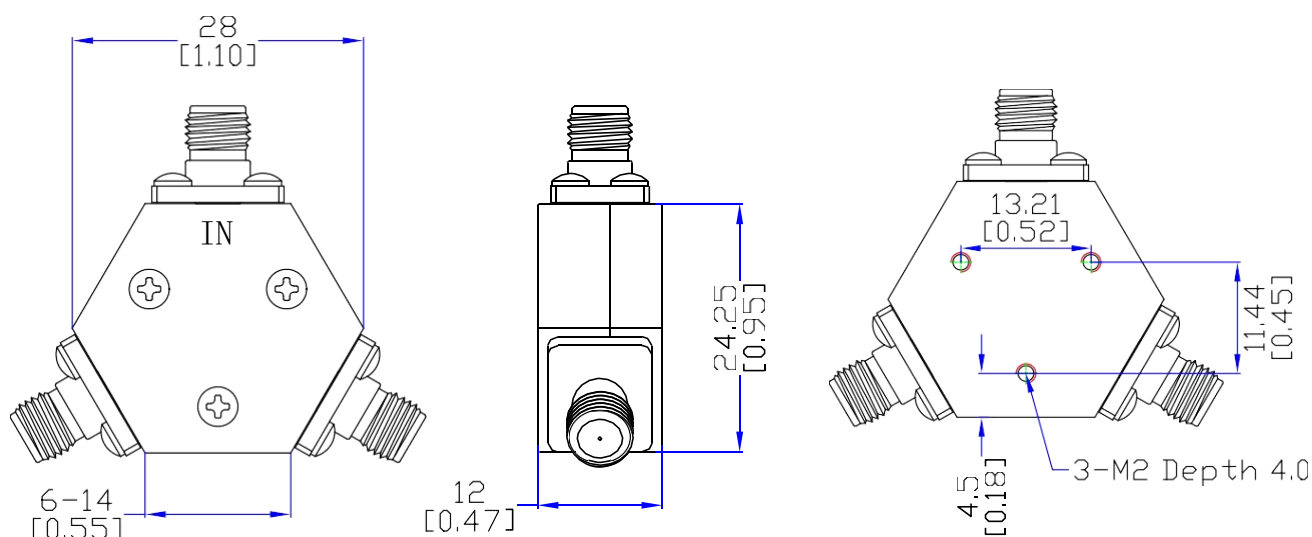


Typical test curve:

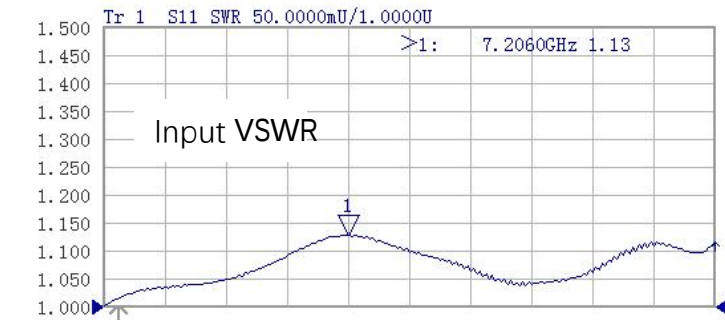


1 通道1 起始:10.0000MHz — 终止:18.0000GHz

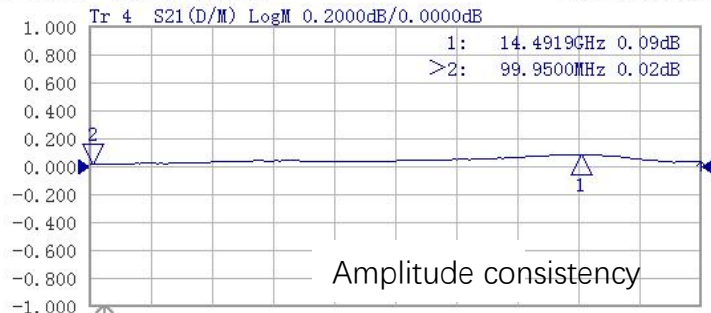


3 通道1 起始:10.0000MHz — 终止:18.0000GHz

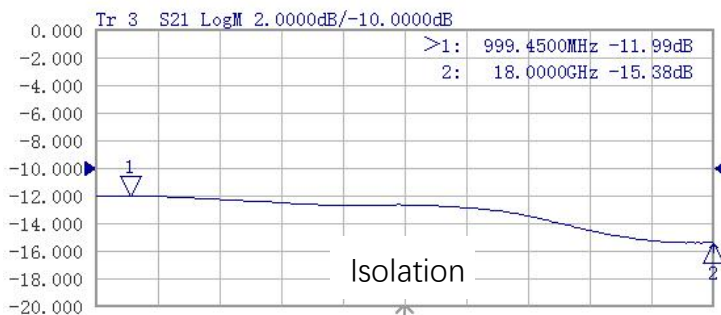

2 通道1 起始:10.0000MHz — 终止:18.0000GHz

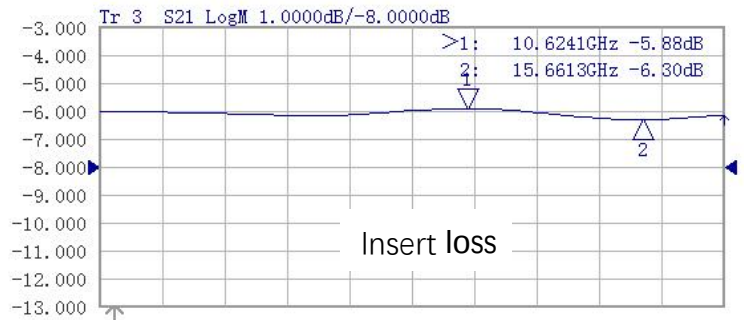

2 通道1 起始:10.0000MHz — 终止:18.0000GHz

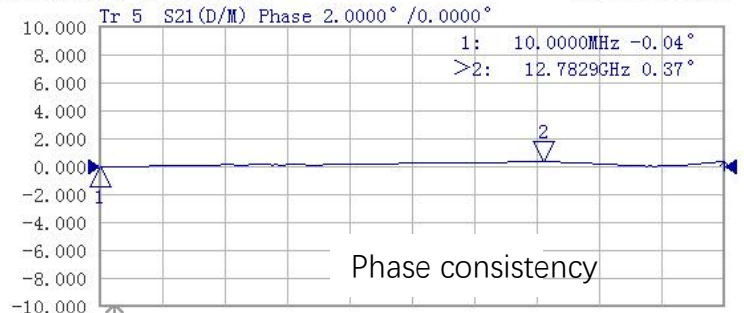

4 通道1 起始:10.0000MHz — 终止:18.0000GHz

