



► K/2S series

Frequency(GHz)	40G	Material/Surface treatment	
Standing wave	1.15	Outer conductor	Stainless steel/deactivation
Durability	3000times	Inner conductor	Beryllium bronze/gold-plated
		Insulator	PEI


K/2S-JJG

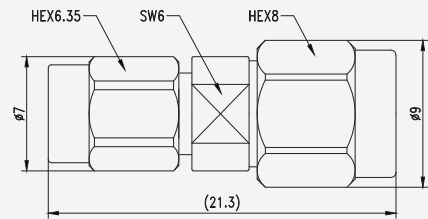

K/2S-JKG

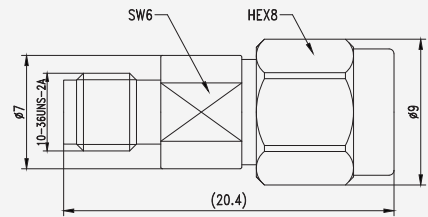

K/2S-KKG

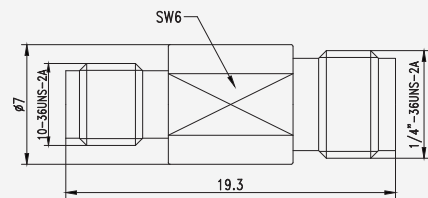

K/2S-KJG

